




752 S. Grove St.
Ripon, WI 54971
920-810-5561
William F Hoch

Interior Renovation
410 Trillium Circle

ADD1 APR. 19, 2021
CB1 MAY 21, 2021

APRIL 12, 2021

A1.1

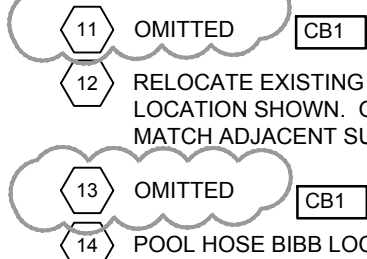

- 6 REPAIR EXISTING DAMAGED GYPSUM BOARD CEILINGS AS REQUIRED TO MATCH EXISTING ADJACENT SURFACE. SEE ROOM FINISH SCHEDULE FOR SPECIFIED FINISH REQUIREMENTS.
- 2 INSTALL NEW PORCELAIN WALL TILE AS REQUIRED. MATCH ADJACENT WATER FEATURE HEIGHT. USE EXISTING ATTIC STOCK FOR MATERIAL. - BY OWNER DIRECT CONTRACTOR.
- 3 PLUMBING CONTRACTOR TO RELOCATE WATER LINES TO ELIMINATE POTENTIAL FREEZING ISSUES. COORDINATE WITH ARCHITECT FOR FINAL LOCATIONS AND APPEARANCE.
- 4 ELECTRICAL CONTRACTOR TO PROVIDE BRUSHED STAINLESS STEEL POWER POLE TO ISLAND STYLIST STATIONS FROM CEILING. COORDINATE WITH ARCHITECT FOR FINAL LOCATIONS AND APPEARANCE.
- 5 INSTALL SALVAGED CASEWORK AND COUNTERTOP (AND PLUMBING FIXTURE) AS REQUIRED. SEE CASEWORK ELEVATIONS SHEET A6.0. GC TO PATCH AND REPAIR WALL AS REQUIRED TO ACCOMMODATE PLUMBING.
- 6 INSTALL SALVAGED CASEWORK AND COUNTERTOP (AND PLUMBING FIXTURE) AS REQUIRED. RE-SIZE AS PER CASEWORK ELEVATIONS SHEET A6.0.
- 7 ELECTRICAL CONTRACTOR TO PROVIDE IN FLOOR POWER TO MESSAGE TABLES. COORDINATE LOCATION WITH GENERAL CONTRACTOR.

8	ELECTRICAL CONTRACTOR TO PROVIDE POWER TO STYLING STATIONS AND DRYER CHAIRS. COORDINATE LOCATION W/ GENERAL CONTRACTOR.	
9	PLUMBING CONTRACTOR TO PROVIDE WATER AND SANITARY TO WASH STATIONS AS REQUIRED. GC TO PATCH AND REPAIR WALLS AS REQUIRED TO ACCOMMODATE PLUMBING.	
10	REMOVE EXISTING CLEAR COAT FINISH FROM EXISTING METAL COUNTERTOPS. APPLY NEW CLEAR COAT FINISH AS REQUIRED TO WITHSTAND NAIL CHEMICAL AND POLISH APPLICATION.	
11	OMITTED	CB1
12	RELOCATE EXISTING FIRE EXTINGUISHER CABINET AS REQUIRED TO LOCATION SHOWN. GC TO PATCH AND REPAIR EXISTING OPENING TO MATCH ADJACENT SURFACES.	
13	OMITTED	CB1
14	POOL HOSE BIBB LOCATION. COORDINATE WITH POOL PLANS.	

The diagram illustrates different wall and door configurations and the number of sheets required for each:

- WALL TYPE - SEE SHEET A6 SHEETS**: A wall section with a single sheet indicated by a dashed line and a small square symbol.
- EXIT SIGN**: A wall section with an exit sign symbol.
- FIRE EXTINGUISHER W/ CABINET - SEE SHEET A1.1**: A wall section with a fire extinguisher symbol and the text "FEC".
- EXISTING WALL TO REMAIN**: A wall section with a solid line and a dashed line.
- EXISTING WALL TO BE REMOVED**: A wall section with a dashed line.
- STUD WALL**: A wall section with a solid line and a dashed line.

SEE PLAN FOR ALL WALL WIDTHS

EXISTING DOOR TO REMAIN: A door section with a solid line and a dashed line.

EXISTING DOOR TO BE REMOVED: A door section with a dashed line.

NEW DOOR: A door section with a solid line and a dashed line.

- ALL INTERIOR DIMENSIONS ARE FROM FACE-OF-STUD TO FACE-OF-STUD
- PROVIDE WOOD BLOCKING FOR ANY FURNISHINGS BY OWNER. (VERIFY LOCATIONS)
- ALL SALON EQUIPMENT TO BE PROVIDED BY OWNER. GO TO COORDINATE ELECTRICAL AND PLUMBING REQUIREMENTS
- COORDINATE ALL POOL REQUIREMENTS WITH THE POOL CONTRACTOR PRIOR TO COMMENCEMENT OF WORK.
- SUPPLIERS AND CONTRACTORS SHALL FIELD VERIFY ALL MATERIALS AND EXISTING RE-USED ITEMS PRIOR TO ORDERING ADDITIONAL MATERIALS

SCALE: 1/8" = 1'-0"

